

■ INTRODUCTION

The CVT-485_422-3 is a compact, rugged, industrial-grade, port-powered, optically-isolated, bi-directional RS-232 to RS-485 / RS-232 to RS-422 converter, which can be used to convert any standard RS-232C port into a two-wire half-duplex RS-485 port or a four-wire full-duplex RS485/RS422 port and vice versa. This product features opto-isolation circuitry, which effectively protect your RS-232 devices from ground loops, noise problems, transient surges, remote lightning and spikes. The unit is powered from the RS-232 data line; it also supports data direction auto-turnaround. Therefore, no external power, software drivers or flow control is required.

■ FEATURES

- Industrial grade enclosed in a rugged, rustless ABS housing.
- Port-powered, no external power is required.
- Accepts external 5VDC regulated power if the port power is insufficient.
- Optical isolation effectively protects your RS-232 devices from ground loops, noise problems, transient surges, remote lightning and spikes.
- Plug and play; Data direction auto-turnaround, no software drivers or flow control is required.
- Operating temperature: -40°F to 185°F (-40°C to 85°C).
- Built-in 600W surge protection, 15kV static protection and circuit protection.
- Built-in 120Ω end-of-line terminator for reliability and easy installation.
- Surface Mount Technology manufactured to RoHS and ISO-9001 standards.
- Safety: Strictly certified by TUV (Cert No. SG-CE-090012).
- 5-year manufacturer's warranty.

■ SPECIFICATIONS

| | |
|--------------------------|--|
| Compatibility: | EIA/TIA RS-232C standard and RS-485/RS-422 standard |
| Power Source: | Port power from RS-232 data line |
| Current Consumption: | Less than 10mA |
| Optical Isolation: | 2500Vrms (AC, 1 min) |
| Baud Rates: | 1,200 to 38,400bps (auto-sensing and self-adjusting) |
| Distance: | RS-232 side: 16ft (5m); RS-485/RS-422 side: Depending on power from RS-232 port, will transmit up to 4000ft (1.2km) at 19,200bps |
| Connector: | RS-232 side: DB-9 Female; RS-485/RS-422 side: DB-9 Male; Termination Board: DB-9 Female and a 6-Way Terminal Block |
| Maximum Number of Drops: | 64 |
| End-of-Line Terminator: | 120Ω (Built-in) |
| Surge Protection: | 600W |
| Static Protection (ESD): | Up to 15KV |
| Dimensions (H x W x D): | 0.63 x 1.3 x 3.5 in (16 x 32 x 90 mm) (with termination board) |
| Weight: | 1.4 oz (40 g) (with termination board) |
| Operating Temperature: | -40°F to 185°F (-40°C to 85°C) |
| Operating Humidity: | Up to 90% RH (no condensation) |

■ PIN ASSIGNMENT


RS-232 Side (DB-9 Female Connector):

| | | | | | | | | |
|---------------------------|---------------|---|---------------|---|----|----|-----|---|
| DB-9 Pin: | 1 | 4 | 6 | 7 | 8 | 2 | 3 | 5 |
| Function/Internal Wiring: | tied together | | tied together | | TX | RX | GND | |

RS-485/RS-422 Side (DB-9 Male Connector / Termination Board):

| | | | | | | | | | |
|-----------|---------------------|-----|---------------------|-----|-----|---------------------|---|--|---|
| DB-9 Pin: | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 4 |
| Jumper: | J2 (default: ON) | | J3 (default: ON) | | | J1 (default: ON) | | J4 (default: ON) | |
| RS-485: | A+ (J2 ON) | | B- (J3 ON) | | GND | (J1 ON) | | Terminate/remove Jumper J4 to turn ON/OFF the 120 end-of-line terminator | |
| RS-422: | (J2 OFF) | | (J3 OFF) | | GND | (J1 OFF) | | | |
| | TX+ | RX+ | TX- | RX- | | | | | |

Termination Board:



- The numbers on the left indicate the pin assignment of DB-9 male connector (RS-485/RS-422 side).
- The unit will function correctly only when the voltage on +5V pin is around +5VDC (when RS232 port is connected). Otherwise, please check the connection. External 5VDC regulated power supply is accepted.
- The unit comes with a built-in 120Ω end-of-line terminator; connect it (Jumper J4 ON) when the data rate is over 19.2kbps or the RS485/RS422's distance exceeds 660ft (200m).

■ CONNECTIONS

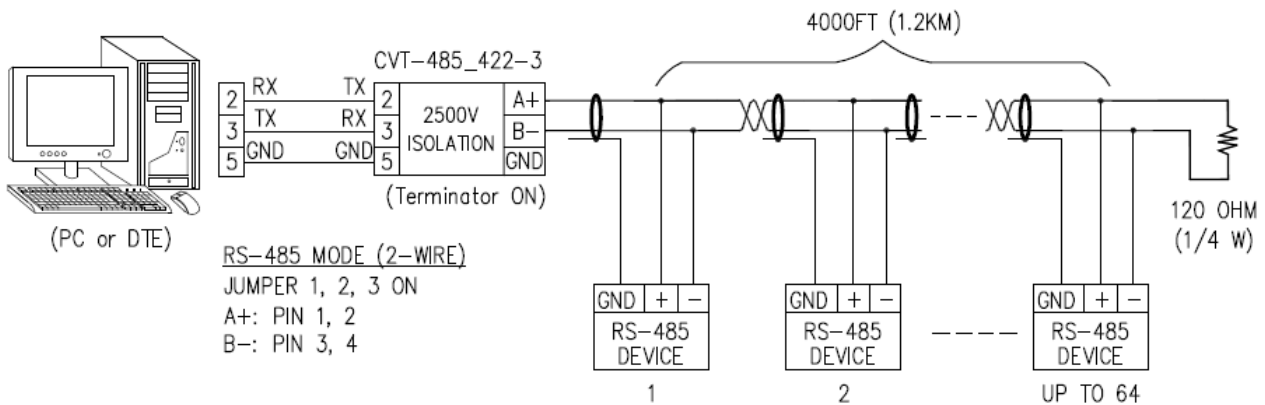


FIGURE 1: MASTER-SLAVE MULTI-DROP CONNECTIONS (RS-485)

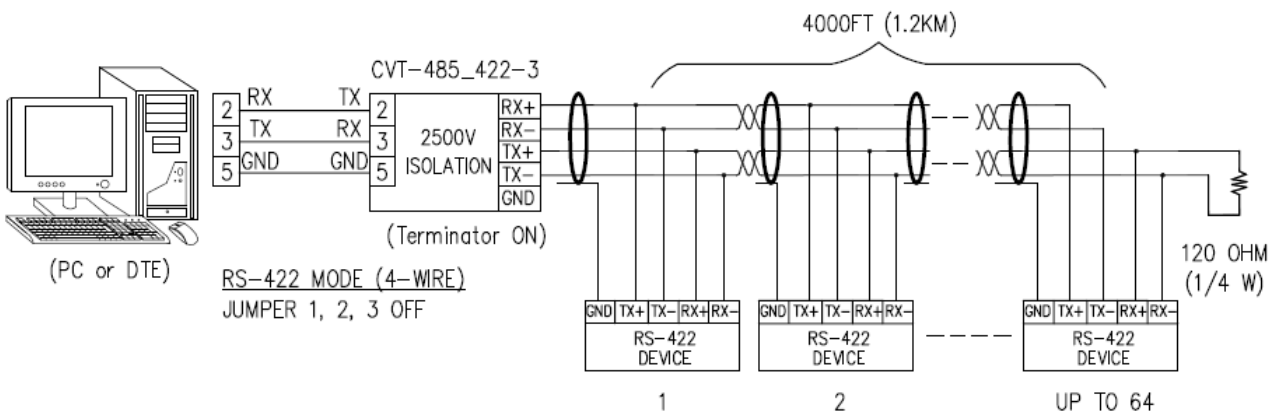


FIGURE 2: MASTER-SLAVE MULTI-DROP CONNECTIONS (RS-422)

■ INSTALLATION NOTES

- Connect the PC's (or other DTE device's) COM port to the RS-232 side of CVT-485_422-3, use a cross-over (Null-Modem) cable for DCE device.
- 120-Ohm terminator: If you are using the converter with the provided terminal block, terminate the Jumper "J4" to turn ON the terminator and remove it to turn the terminator OFF. If you are using the converter without the provided terminal block, short pin 4 & 8 on the DB-9 connector (RS-485/422 side) to turn ON the terminator.
- The 120Ω end-of-line terminator adds heavy DC loading to a system; connect it only when the data rate is over 19.2kbps or the RS485/422's distance exceeds 660ft (200m).

■ TROUBLESHOOTING

- Perform a loopback test by using CommFront's 232Analyzer software: Remove Jumper 1 and terminate Jumper 2 and 3, then send commands from the 232Analyzer software. You should receive an echo of the commands sent. By performing a simple loopback test like this, you can test both the transmitter and receiver of the converter. This is very helpful when you are in doubt about the performance of your converter.